



REFLECTED PLAN VIEWS


10x10 HOUSING
65W

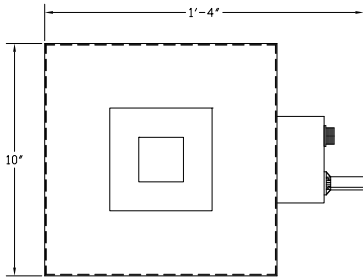


8x8 HOUSING
50W

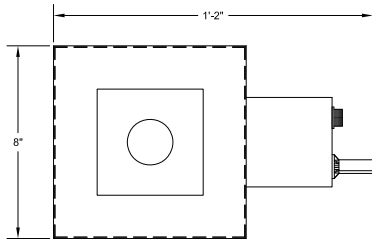

OBJECT ASSEMBLY

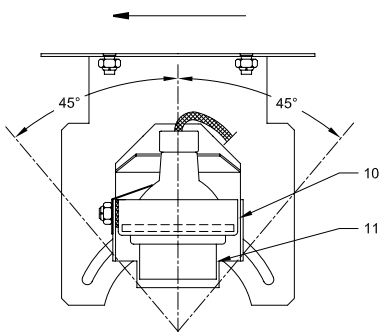

WALLWASH ASSEMBLY

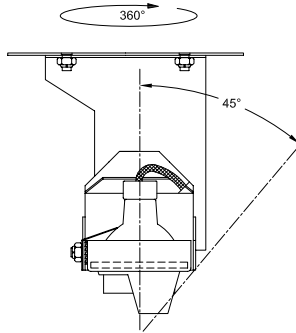

NOTES:

1. 20 GA steel housing
2. 12V MR16 lamp 50W max (by others)
3. Lens*
4. Electronic transformer
5. Thermal protector
6. Transformer box
7. Adjustable mounting bar (2)
8. Square flat plate trim
9. 3/4" wood or stone ceiling
10. Lamp holder assembly
11. Object front end

SPOTLUX 4

FLAT PLATE


FOR WOOD OR STONE CEILINGS

SPOTLUX 4 is a 4" by 4" flat plate incandescent MR16 adjustable downlight or wallwash fixture designed to provide an elegant form of recessed illumination. Square flat plate trim is available in both round or square apertures, and provides low source brightness in combination with the internal lampholder snoot and clear solite lens. It is designed for flangeless installation in wood or stone ceilings. Rapid relamping is made possible by flipping the lamp carriage down below the ceiling. Fixed downlight versions are also available.

FEATURES:

- Aluminum 4"x4" square flat plate trim with round or square aperture opening
- Adjustable accent or wallwash capabilities
- Spotlux mechanism allows lockable tilt angles up to 45° from vertical and full lockable rotation
- Full lockable 360° rotation
- Individual lensing options at lamp
- Additional accessories are available
- Non-IC thermally protected luminaire
- Suitable for damp location with open trim assembly
- Suitable for wet location only with covered ceiling mount and lens trim assembly

SPOTLUX 4 is NRTL (Nationally Recognized Testing Laboratory) certified for purposes of OSHA safety standards product-approval requirements.

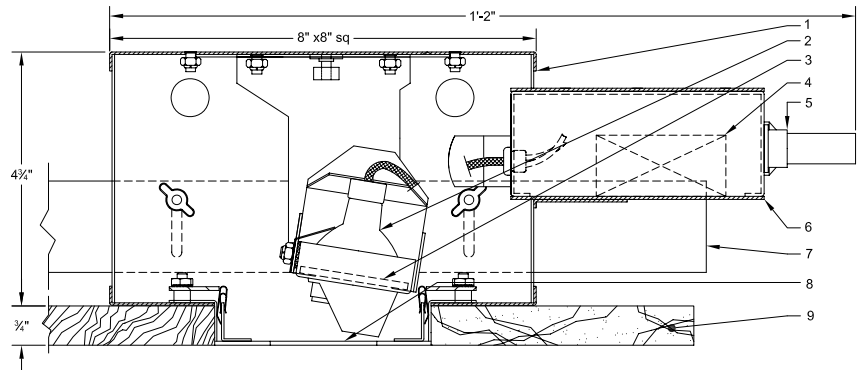

ORDERING MATRIX: **SPT4-SFP-W-** _____

Application	Wattage	Voltage	Transformer	Interior Finish	Trim Aperture	Trim Finish	Lamp Lens	Trim Lens	Additional Accessories
AO Adj Object	50W 8x8	120 120/12V	E Electronic	B Black	R Round	W White	C Clear Pyrex	N None	N None
AW Adj Wallwash	65W 10x10		AE AFCI Electronic	W White	S Square	B Black	S Solite	C Clear Pyrex	HC Hex Cell Louver
D Downlight			M Magnetic			CA Clear Anodized	D Stippled	S Solite	CUV Clear UV Lens
						C Custom	LS Linear Spread		O Other
							WW Wallwash5 5/75*		UVC UV Lens Coating
									WL Wet Location

*Wallwash front end lamp lens option is WW-Wallwash 55/75 **ONLY**. No trim lens option available for wallwash front end. EXAMPLE: SPT4-SFP-W-AO-120- _____ WW-N- _____
Contact NULUX directly to specify custom products